

# Saramonic K9 Local Upgrade Guide

## For Pre-Launch Samples Only

### Important Notes:

- a. **Do not rename any upgrade files.**
- b. If the firmware version is not **V1.9.9.014.016** after the upgrade, restart the upgrade process.
- c. Each device (2TX and 1TX) must complete the entire upgrade process individually.

### The following are the specific steps:

- a. Insert the **SD card into the TX unit** (RX unit does not require an SD card).
- b. Power on the TX unit and navigate to **DEVICE MGMT > SYS > READ**.
- c. Connect the TX unit to a computer via a **USB cable**. The computer should recognize it as a USB drive.




- d. Copy the **upgrade files** to the **root directory** of the USB drive that appears on the computer. Ensure that the **correct files are placed in the corresponding TX/RX folders** and **do not modify the file names**. If the TX unit **fails to copy the files** or an error occurs, format the **SD card in the computer** before retrying:
  - **TX unit:** Format as **FAT32** with a **32 KB allocation unit size**.
  - **RX unit:** Format as **FAT** with the **default allocation unit size**.

RX	2025/2/21 11:31	文件夹
TX	2025/2/21 11:31	文件夹

### TX Formatting




### RX Formatting

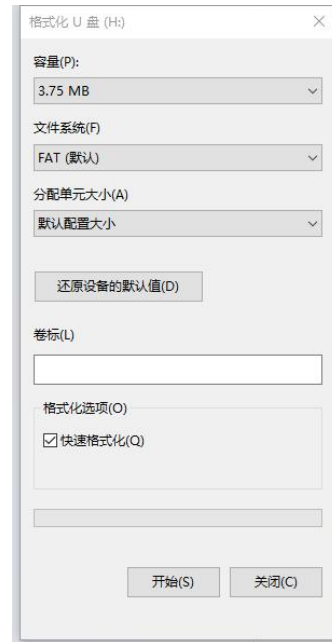


- e. Exit **READ** mode, navigate to the **UPGRADE**, and **confirm** to start. The device will upgrade and **automatically reboot** once completed.


**TX:** Select **Confirm** to start the upgrade.

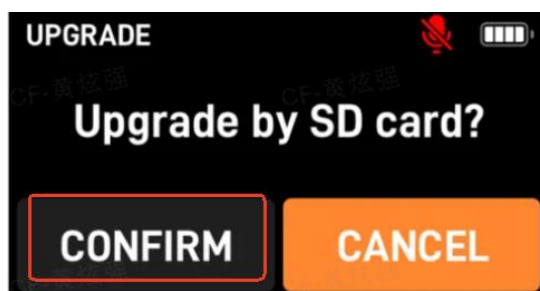


**RX:** Select **Confirm** to start the upgrade.

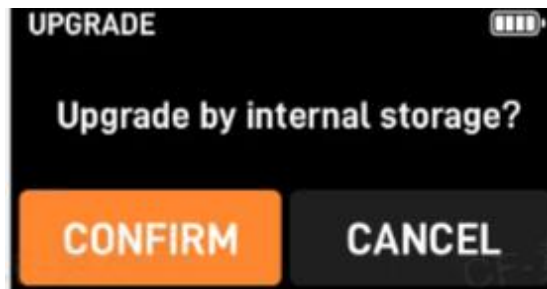

#### Upgrading Process and Completion

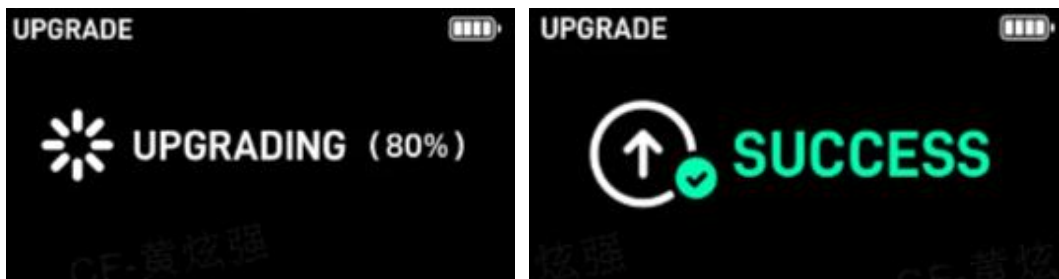

- f. After the device successfully reboots, go to **DEVICE MGMT > SYS > VERSION**, check the firmware version: **V1.9.9.014.016**.

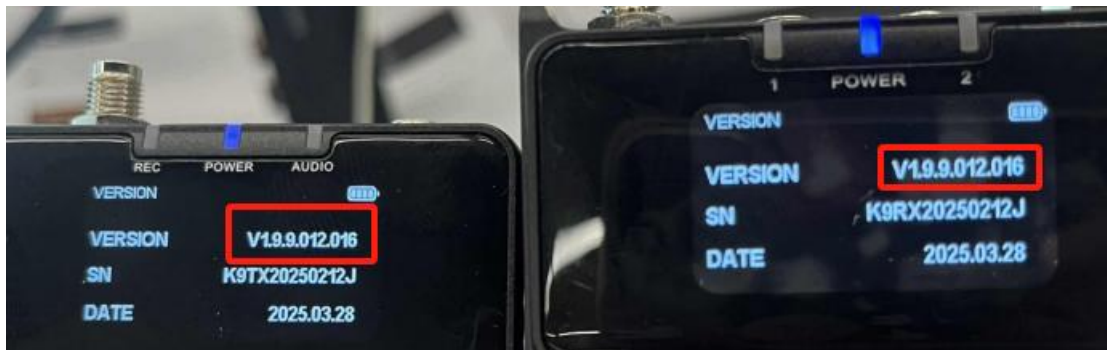

The above picture is only for reference. Please refer to V1.9.9.014.016 for the correct version number.

# Saramonic K9 固件升级指南

仅限发布前测试样机使用

升级前注意事项：

1. 不能修改任何文件命名；
2. 升级后固件版本应为 **V1.9.9.014.016**，如果不是，请重新升级；
3. 每一个设备（2TX，1TX）都需要分别经过以下升级步骤。

以下为具体操作步骤：

1. TX 先将 SD 卡塞进卡槽（RX 不用），开机，进入菜单，设备管理>系统设置>读取模式，插入 USB 线连接到电脑，电脑会弹出 U 盘。




2. 拷贝升级文件到电脑弹出的 U 盘根目录（文件 TX/RX 对应文件夹里面的文件，不要修改名称）。如 TX 提示**无法拷贝或者拷贝不成功**，则电脑端**格式化 SD 卡**后，再拷贝。


1. TX 格式化为 FAT32，分配单元 32 KB。
2. RX 格式化为 FAT 分配单元默认配置。

 RX	2025/2/21 11:31	文件夹
 TX	2025/2/21 11:31	文件夹

TX 格式化

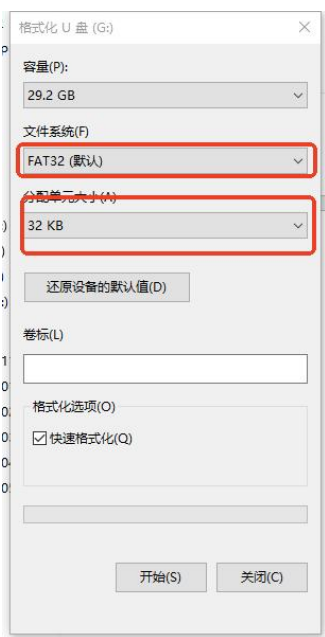


RX 格式化

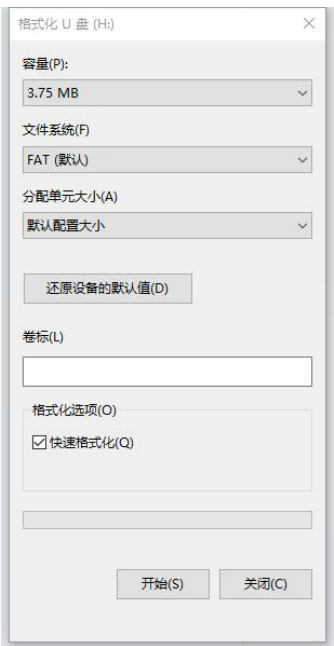


3. 退出读取模式，进入升级菜单，开始升级，直到提示升级成功，设备自动重启。


TX 界面如下：选择确定开始升级

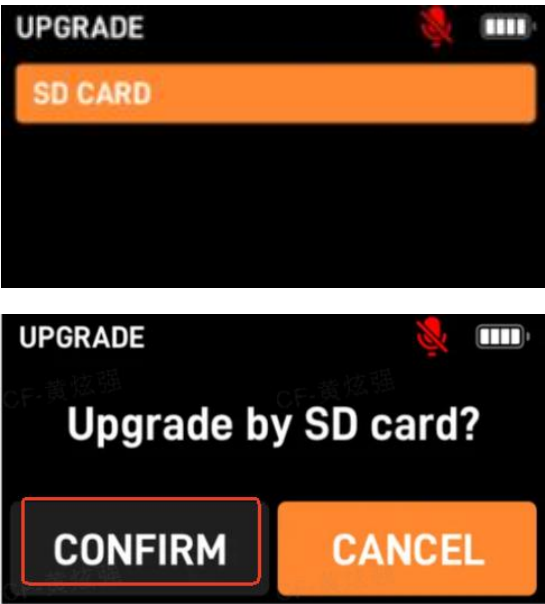


RX 界面如下：选择确定开始升级

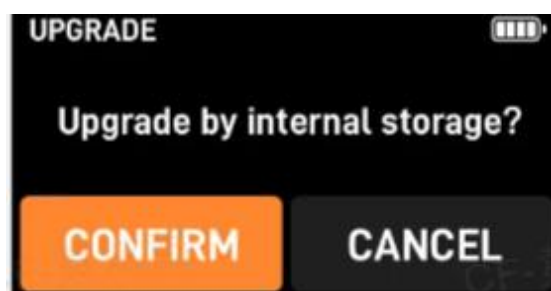

升级过程及结束页面

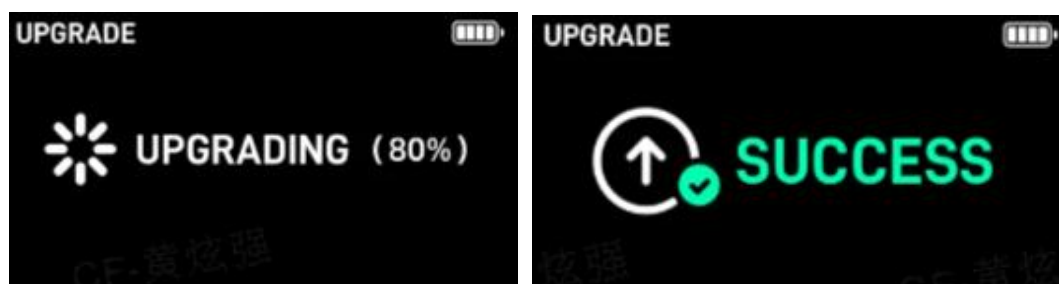

4. 设备升级成功自动重启后，进入菜单，设备管理>系统设置>版本信息，查看版本 **V1.9.9.014.016**。

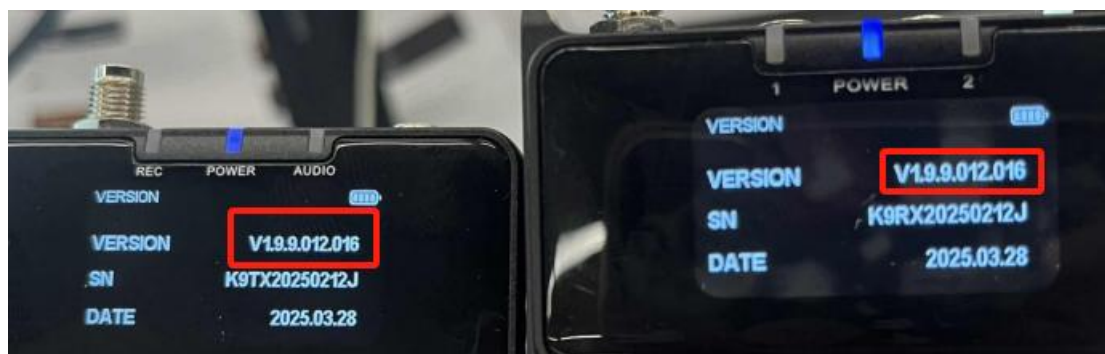

上图仅作为版本号页面示意。正确版本号请以 V1.9.9.014.016 为准。